


THE BOSTON COLLECTION

streamlined minimalist style

CONGRATULATIONS ON THE PURCHASE
OF YOUR

BOSTON 5 DRW TALLBOY

WELCOME TO THE BOS-TB105
INSTRUCTION MANUAL

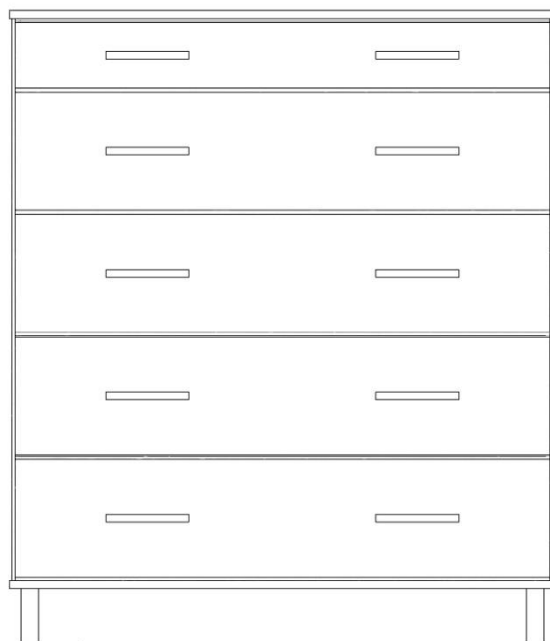

0800 100 858

DID YOU KNOW.....

.....the **Boston** Collection is manufactured right here in New Zealand - by New Zealanders, for New Zealanders. Honest Kiwi Quality that is backed by our signature 5 Year Guarantee*. If by any chance you have a problem during this period, OUR promise to YOU is that we will repair or replace. Additionally, being based right in here New Zealand our experienced team's expertise is near at hand; if you have any problems at all during the assembly process, you can give us a call on our Freephone number (0800 100858) or email us at sales@compacfurniture.co.nz during normal working hours and we will be happy to step you through the process.

The Boston Collection is a **modern and stylish collection**, designed in response to latest interior trends, both in New Zealand and overseas. **Finished in a latest European trending Concise Walnut woodgrain**, The **Boston Collection is right up with the minute**. Paired with a **minimalistic streamlined style** and an **emphasis on strong horizontal lines**, this collection is guaranteed to impress. Fully overlaid drawers give an illusion of length, attributing to the **slim line effect**. Thin silver extruded handles enhance this effect, adding to the overall horizontal theme without complicating surface areas. Tall slim chrome feet contribute the slim-line effect, and create a feeling of space, by lifting the unit up off the ground.

The Boston Collection is constructed from NZ made MDF, a renewable resource from sustainably managed pine forests. This means you can have complete confidence that with The Boston Collection, you are making an environmentally responsible choice.

If you have any questions please visit www.warehousefurniture.co.nz or call the manufacturers direct on 0800 100 858.

WHERE TO ASSEMBLE YOUR CABINET

Assemble your Tallboy on a clean and smooth surface, free of anything which may damage the finished surfaces. A clean, carpeted floor is ideal. If assembling on a workbench or table we suggest you cover it with the carton the Tallboy was packaged in.

Warning! Never leave hardware parts where children can reach them. Small parts may be a choking hazard!

* 5 YEAR GUARANTEE

The Boston Collection carries a **5 year guarantee** against defective material or workmanship, excluding misuse and normal wear and tear. Obviously, as this unit is customer-assembled we cannot guarantee cabinet failure or damage from incorrect assembly. **All claims need proof of purchase – to ensure this register your cabinet at www.warehousefurniture.co.nz.**

Follow the assembly instructions carefully and take note of the precautions below.

- **Avoid direct sunlight wherever possible.**
- **Keep cabinet in a dry place.**
- **Wipe off spilt liquids immediately.**
- **Avoid placing hot items directly on the surface.**
- **Clean with a slightly damp cloth and buff dry with a soft dry cloth - microfibre is ideal.**
- **Do not allow nail polish, removers, deodorant or other damaging chemicals to come into contact with the surface.**

PARTS LIST

Please check you have all the necessary parts before beginning to assembling your cabinet. The measurements provided will help you to identify each part. If any parts are missing or damaged please contact the manufacturers directly, either via our website or our 0800 number. Do not call the store you bought the cabinet from as they will be unable to help you.















QTY	PART NAME	MEASUREMENTS	NOTES	MANUFACTURERS CODE
1	Top	996 x 396 x 15mm	Finished on one side. <i>Blue mark.</i>	106130
1	Base	996 x 396 x 15mm	Finished on one side. <i>Purple mark.</i>	106131
1	LH End	1028 x 377 x 15mm	Finished on one side. <i>Green mark.</i>	106132
1	RH End	1028 x 377 x 15mm	Finished on one side. <i>Red mark.</i>	106133
2	Rails	958 x 80 x 15mm	Plain MDF	106134
1	Small Drw Front	984 x 125 x 15mm	Finished on one side	106135
4	Large Drw Fronts	984 x 221 x 15mm	Finished on one side	106136
1	LH Drw Side – Sml	340 x 95 x 12mm	Plain 12mm	106137
4	LH Drw Side - Lrg	340 x 160 x 12mm	Plain 12mm	102813
1	RH Drw Side – Sml	340 x 95 x 12mm	Plain 12mm	106138
4	RH Drw Side - Lrg	340 x 160 x 12mm	Plain 12mm	102818
1	Drawer Back – Sml	908 x 90 x 12mm	Plain 12mm	106139
4	Drawer Backs – Lrg	908 x 155 x 12mm	Plain 12mm	106140
5	Drawer Bottom	918 x 339 x 4mm	Plain 4mm	106141
5	Drawer Bottom Supports	328 x 50 x 12mm	Plain 12mm	106810
2	Top/Bottom Back Panel	353 x 978 x 4mm	Plain 4mm. <i>Groove on one edge.</i>	102142
1	Centre Back Panel	353 x 978 x 4mm	Plain 4mm. <i>Tongue on two edges.</i>	106144

COLOUR CODING

To help identify the parts, the main components are colour coded with a pen mark on the back edge of the panel. (The unfinished edge.)


- **RED** **Right Hand Parts.** (E.g. RH End, RH Division, RH Drawer Side.)
- **GREEN** **Left Hand Parts.** (E.g. LH End, LH Division, LH Drawer Side.)
- **BLUE** **Tops**
- **PURPLE** **Bases**

HARDWARE LIST

QTY	PART NAME	ASSEMBLY CODE	PICTURE	MANUFACTURERS CODE
CABINET HARDWARE				
8	Connecting Bolts	H1		102649
8	15mm Cams	H2		102511
8	Large Dowels	H15		102515
20	Drawer Slide Screws	H4		102652
4	Large Screws	H5		102648
5	Metal Drawer Slide sets	H21		102480
10	Bar Handles	H56		102472
16	Panhead Screws	H7		106118
4	Tall Feet	H55		106003
DRAWER HARDWARE				
15	Connecting Bolts	H1		102649
15	12mm Cams	H3		102510
10	Large Dowels	H15		102515
20	Small Screws	H6		102642
25	Screws	H9		102645

CAM INSTALLATION & OPERATION GUIDE

The Cam and Connecting Bolt system is used to put your unit together. Below is an explanation of how this system works.

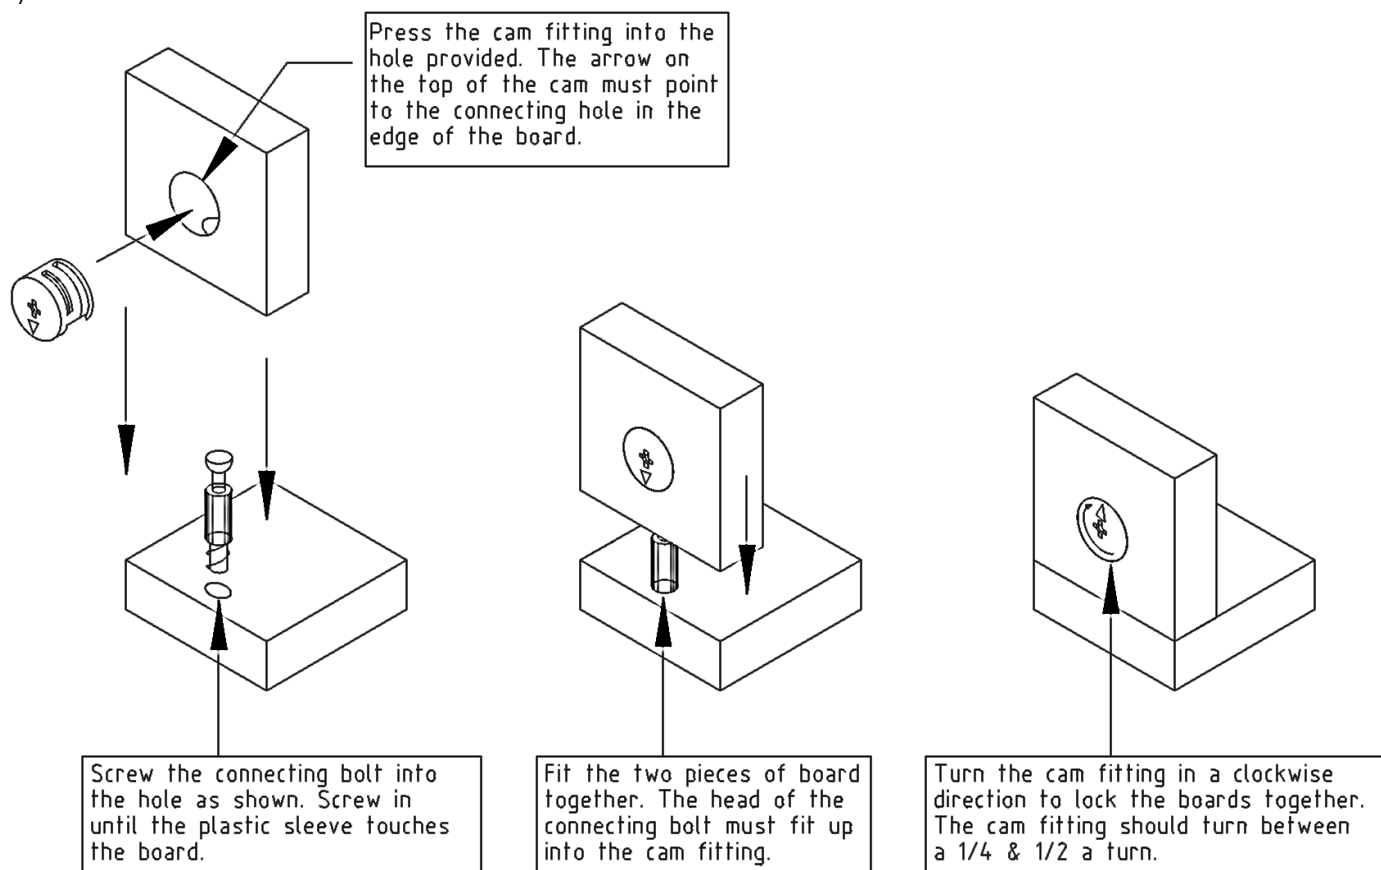

To see a demonstration click on the assembly assistance tab at www.warehousefurniture.co.nz.

DRAWER SLIDES GUIDE

Your pack will contain 5 sets of Metal Drawer Slides. These are bundled together with adhesive tape. Each set comprises of 4 components. Undo the tape on one set at a time and separate the parts.




LEFT HAND PART (DL)



RIGHT HAND PART (DR)

The Drawer Slide components shown above are attached to the **drawer**. They have the letters **DL** or **DR** stamped on them to indicate left hand or right hand components. Put these parts aside for attaching to the drawer later on.

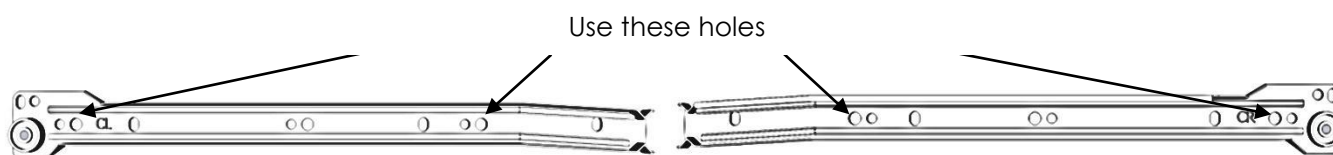

LEFT HAND PART (CL)


RIGHT HAND PART (CR)

The Drawer Slide components shown above are to be attached to the **cabinet**. They have letters **CL** or **CR** stamped on them to indicate left hand or right hand components. You will need these for steps 2 and 3.

INSTALL THE HARDWARE


STEP 1 - TOP

- Lay the Top of the unit finished side down on a clean, clear surface.
- Screw four **H1 Connecting Bolts** into the holes as indicated in the drawing below

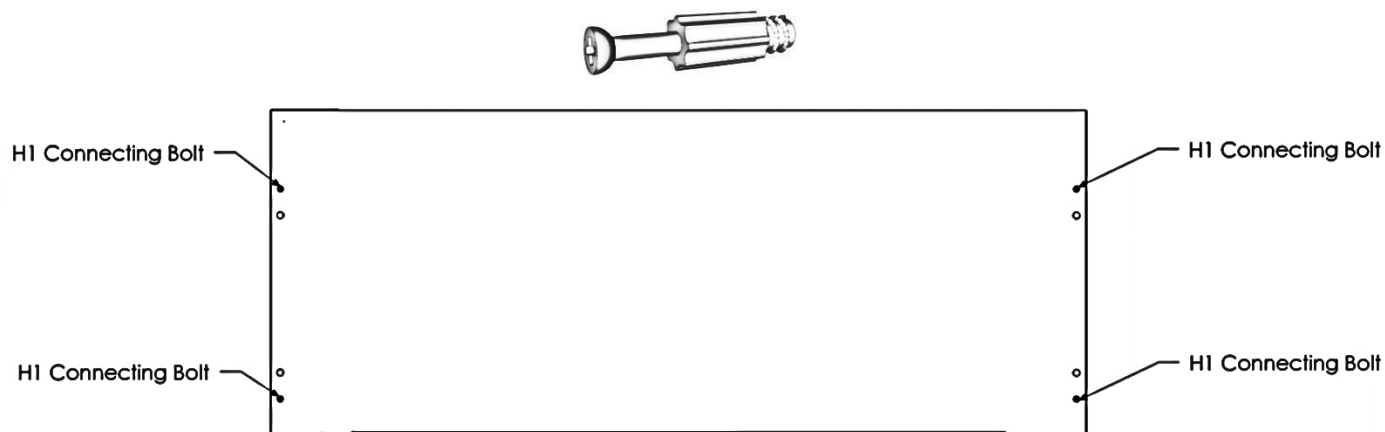


STEP 2 - RAILS

- Take the rails. Insert two **H2 Large Cams** as shown in diagram. Ensure the arrow on the top of the Cam points towards the nearest short edge of the Rail.
- Push one **H15 Dowel** into each end of each rail.

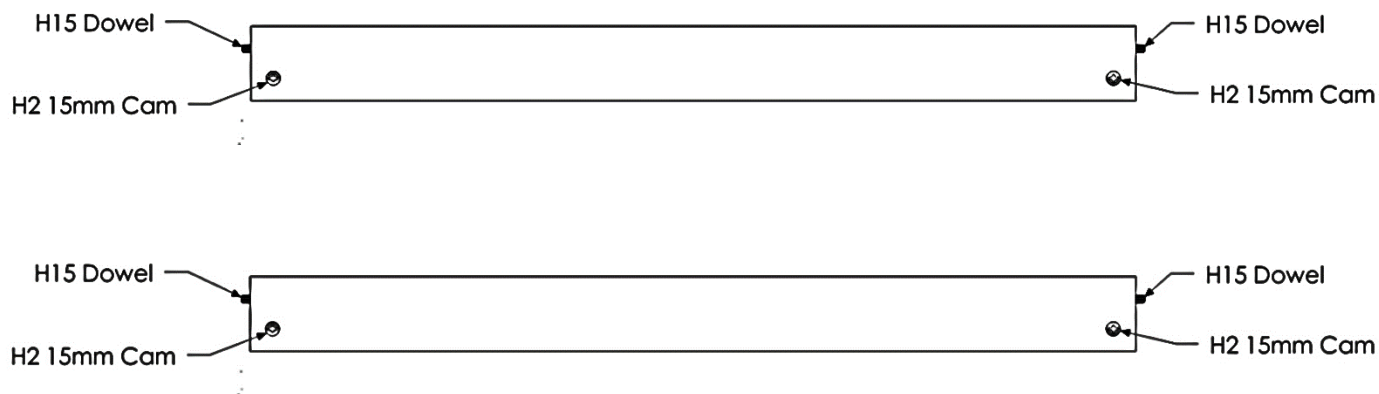


STEP 3 - LH END

- Lay the **LH End** on a smooth clean surface with holes facing upwards.
- Attach five **LH Drawer Slides (CL)** to the LH End using the **H4 Drawer Slide Screws**. Use the holes as indicated in the diagram below - each slide requires two screws. Ensure that the end of the Slide with the wheel faces towards the finished edge of the End.
- Insert two **H2 Large Cams** as shown in diagram. Ensure the arrow on the top of the Cam points towards the top edge of the End.
- Push two **H15 Dowels** into the top edge of the End.
- Screw in two **H1 Connecting Bolts** as shown below.

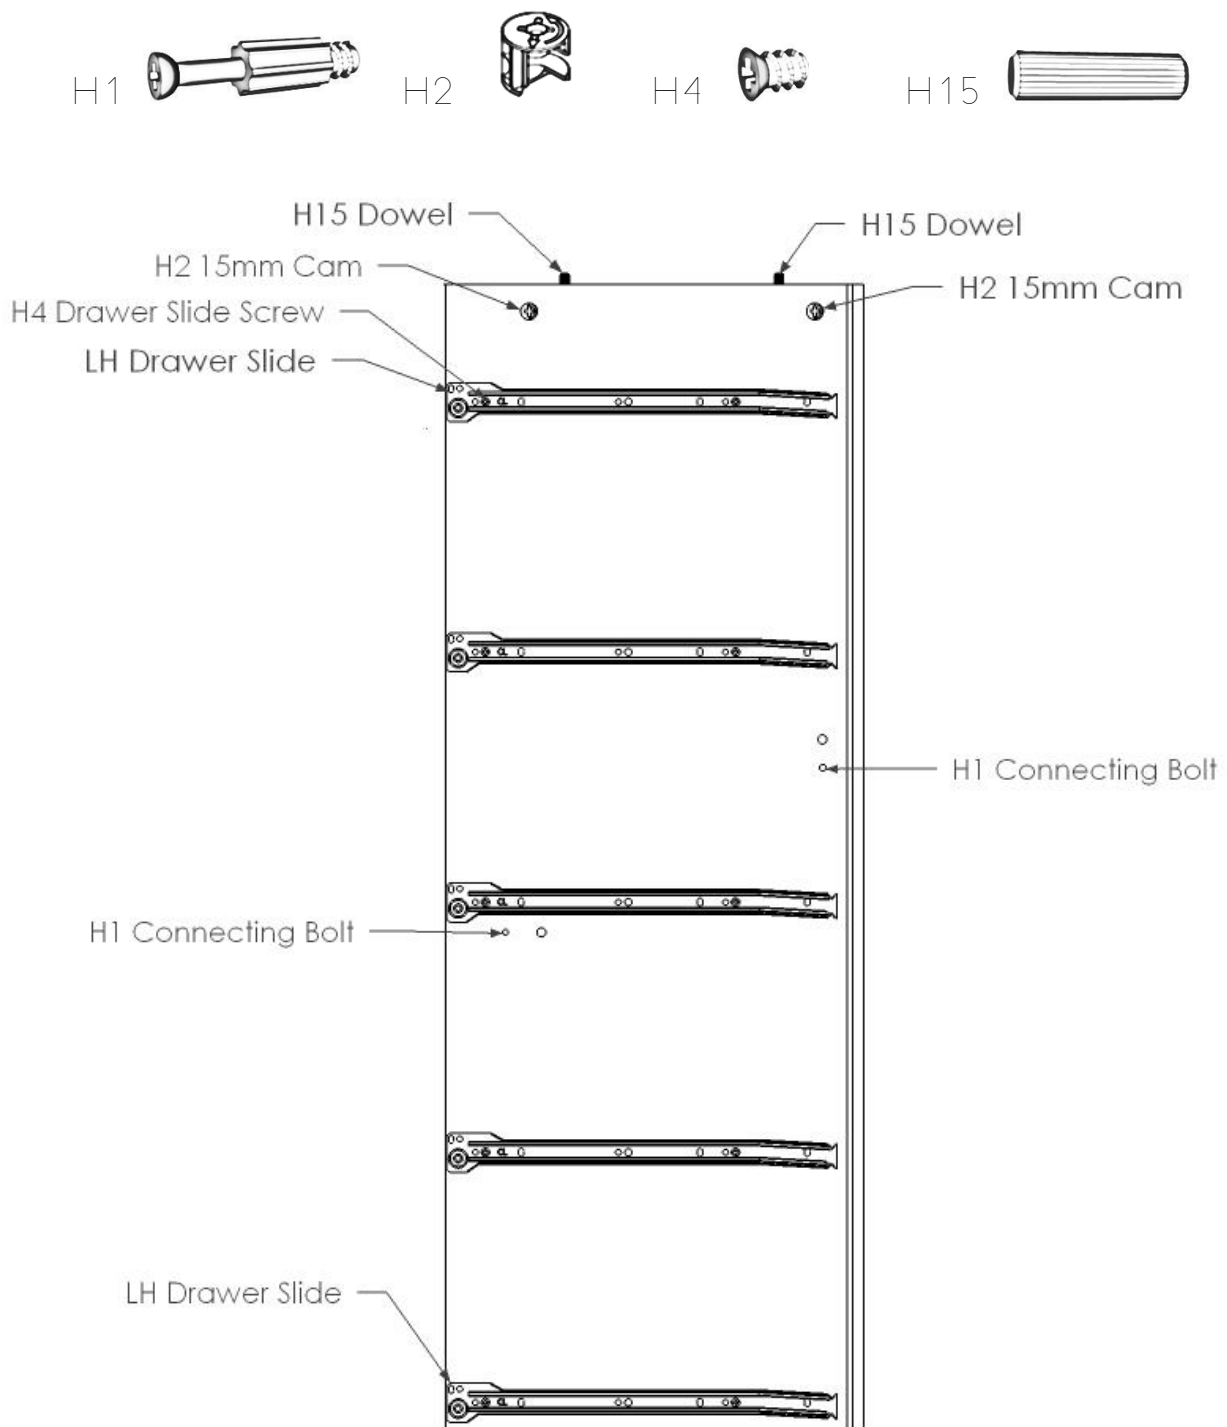

STEP 4 - RH END


- Lay the **RH End** on a smooth clean surface with holes facing upwards.
- Attach five **RH Drawer Slides (CR)** to the RH End using the **H4 Drawer Slide Screws**. Use the holes as indicated in the diagram below - each slide requires two screws. Ensure that the end of the Slide with the wheel faces towards the finished edge of the End.
- Insert two **H2 Large Cams** as shown in diagram. Ensure the arrow on the top of the Cam points towards the top edge of the End.
- Push two **H15 Dowels** into the top edge of the End.
- Screw in two **H1 Connecting Bolts** as shown below.

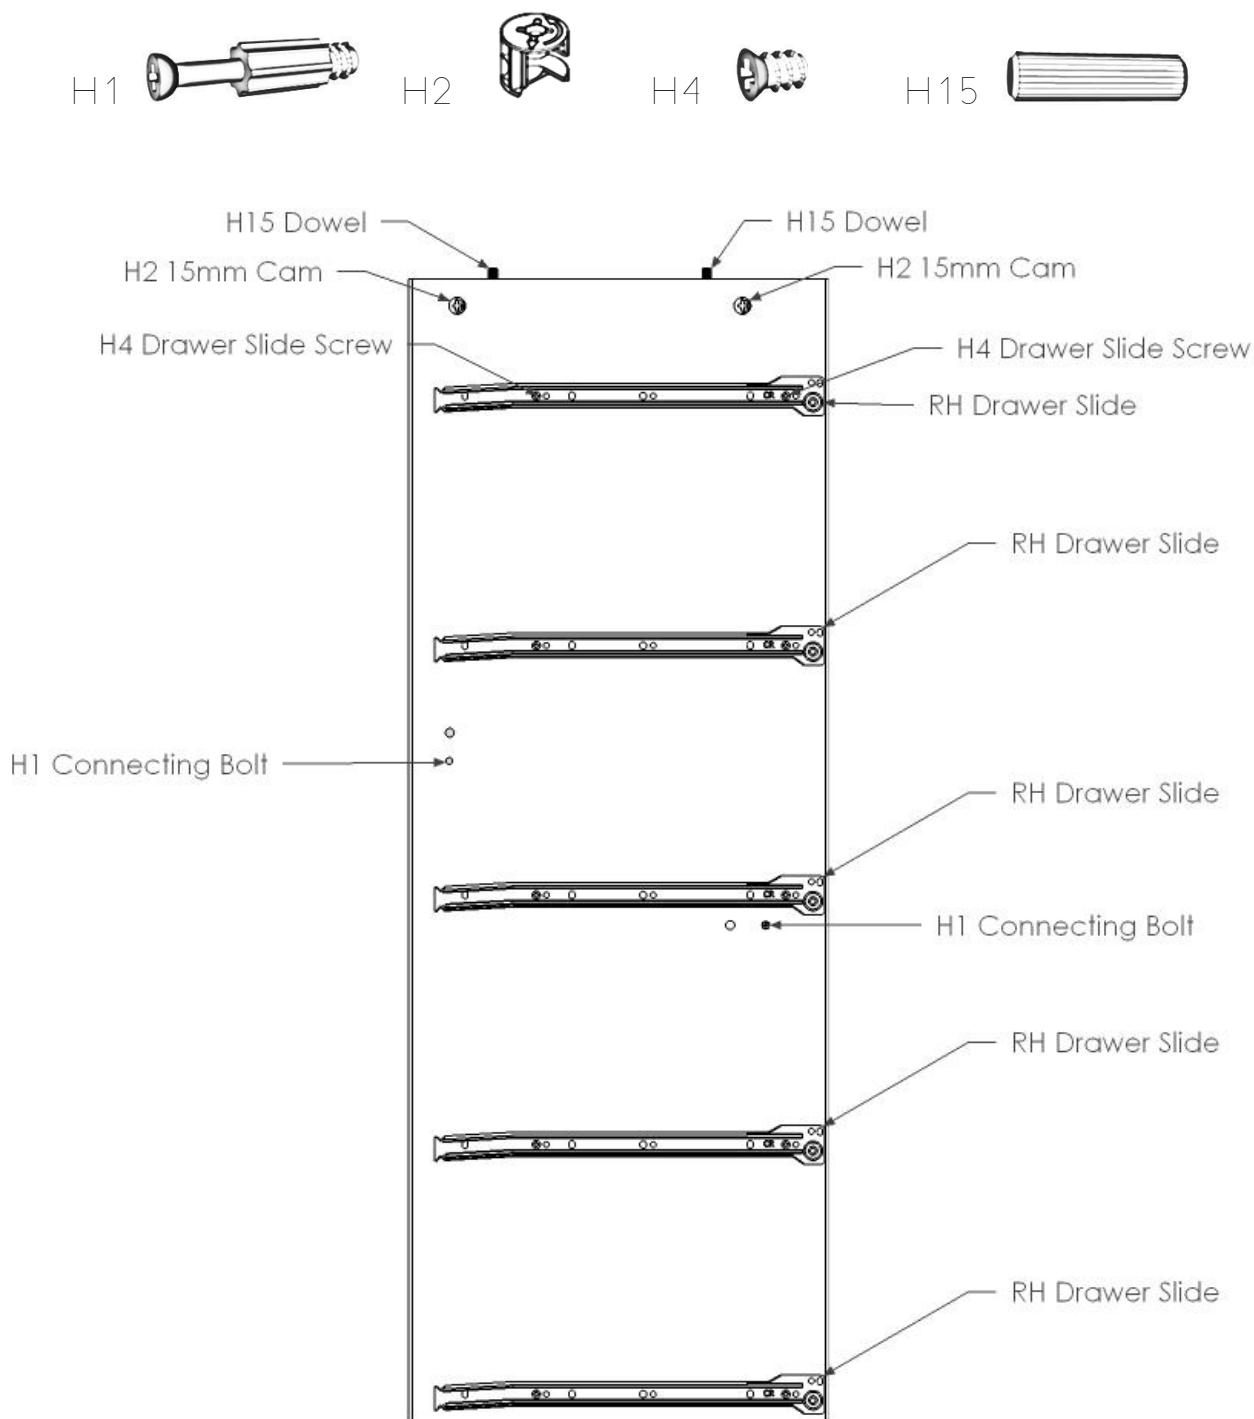

ASSEMBLE THE UNIT


STEP 5 – RAILS TO LH END

- Lay the **LH End** finished side down on a clean clear surface. Fit the two **Rails** as shown below. The H1 Connecting Bolts installed in the End will fit into the H2 Large cams installed in the Rails.
- Turn the Metal Cams installed in the Rails in a clockwise direction to lock the Rails to the End. Ensure they turn a least a $\frac{1}{4}$ to $\frac{1}{2}$ a turn.

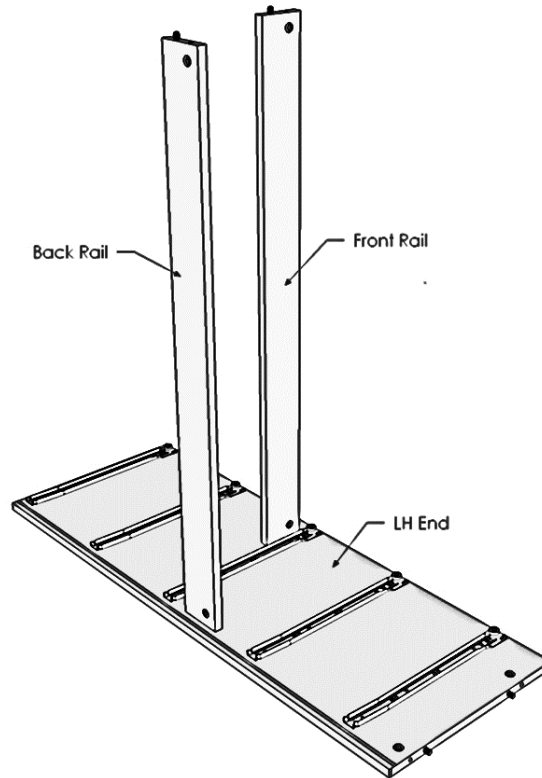


STEP 6 – RH END

- Attach the **RH End** to the **Rails** by connecting the H1 Connecting Bolts installed in the RH End to the H2 15mm Cams installed in the Rails as shown below.
- Turn the Metal Cams installed in the Rails in a clockwise direction to lock the Rails to the End. Ensure they turn a least a $\frac{1}{4}$ to $\frac{1}{2}$ a turn.

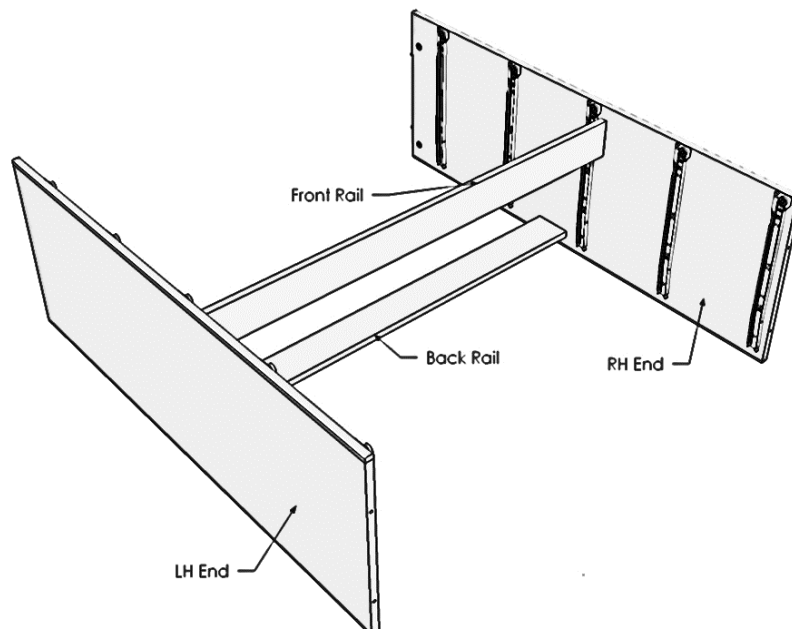


STEP 7 - BASE

- Attach the Base to the Ends using the **H5 Large Screws** and the pre-drilled holes as shown below.

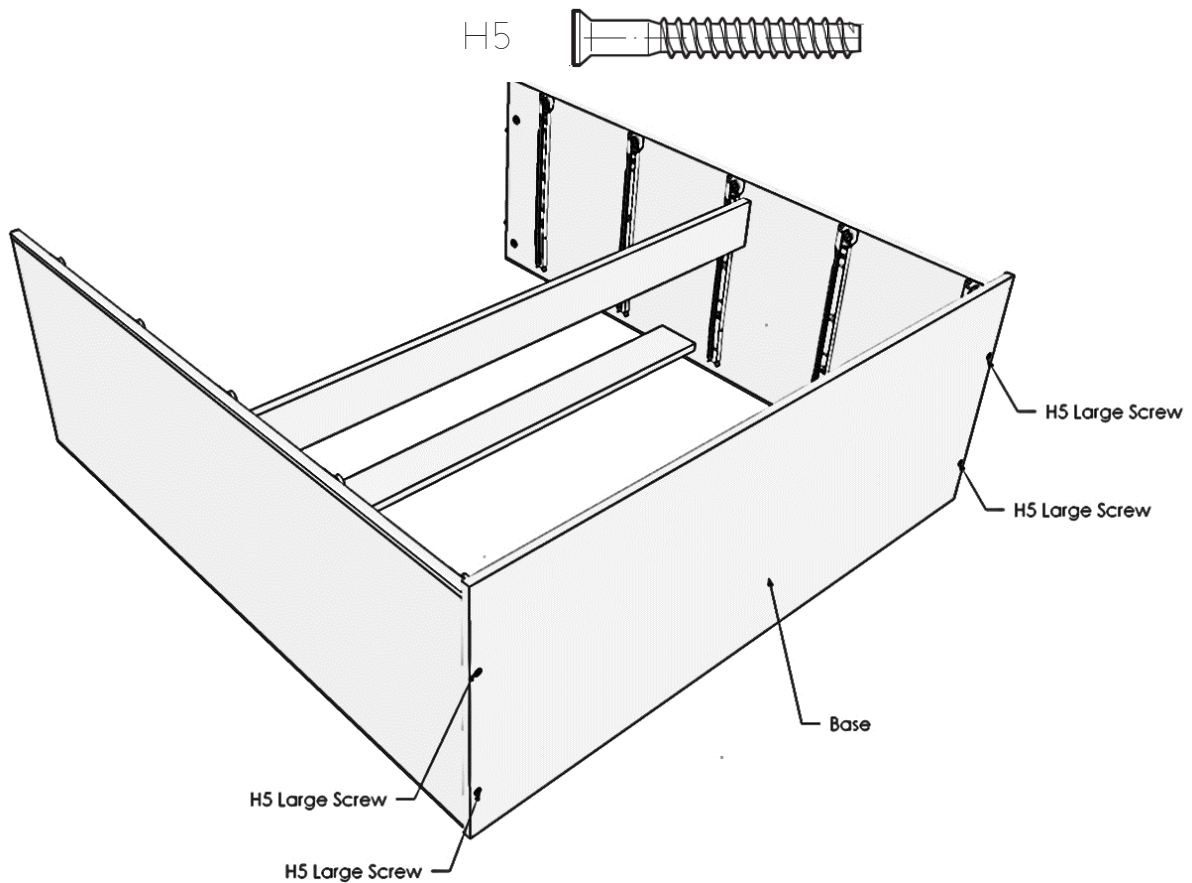


STEP 8 - TALL FEET

- Next screw on the four **H55 Tall Feet** using the **H7 Panhead Screws**. Use the pre-drilled holes.

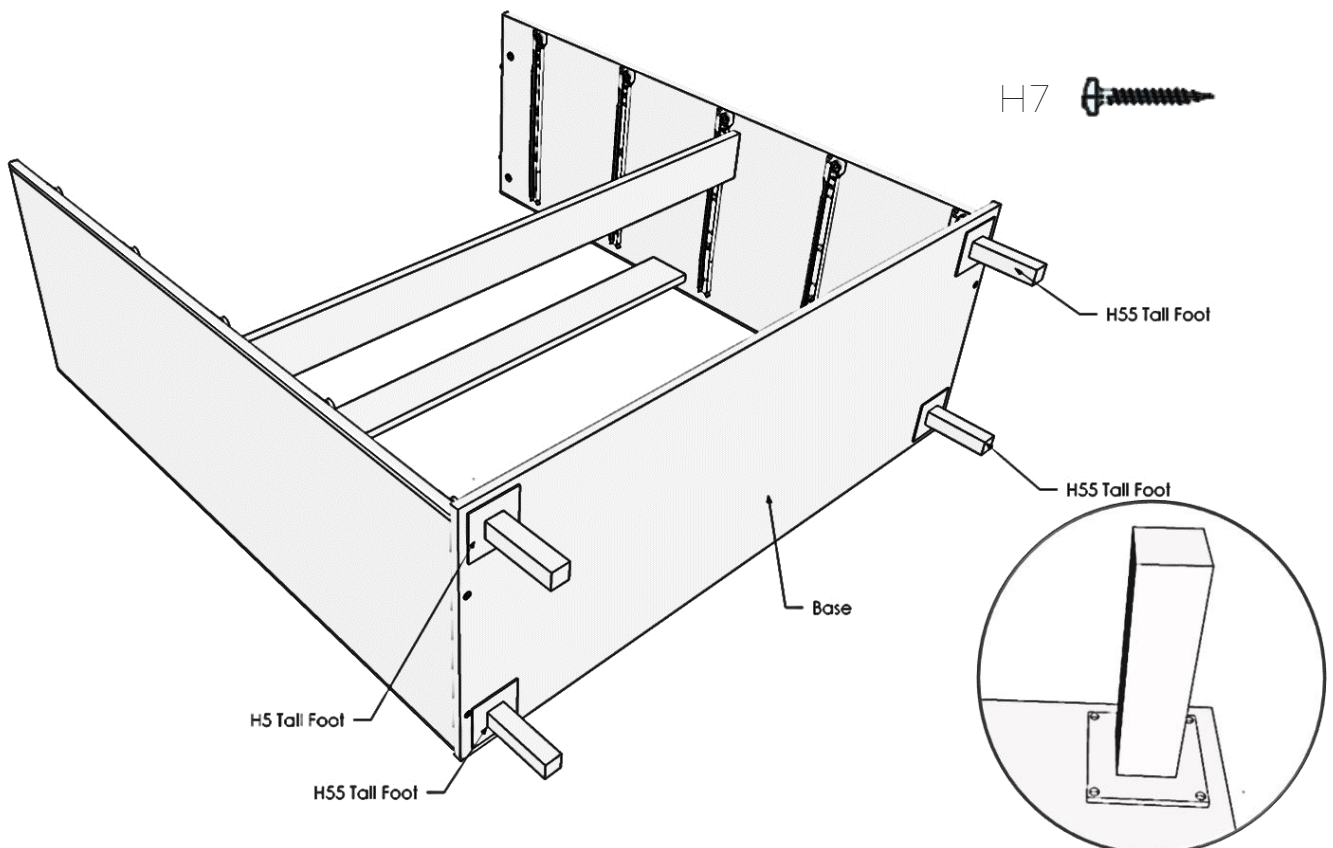


STEP 9 - BACK PANEL

- Carefully stand the unit upright.
- Take the **Bottom Back Panel** with the groove (the Top and Bottom Back Panels are interchangeable). Slide this between the grooves in the Ends of the cabinet. Ensure that the Bottom Back Panel fits into the groove in the Base, and that the groove in the edge of the Bottom Back Panel is facing towards the top of the unit.
- Take the **Centre Back Panel**, with the tongues. Slide this between the grooves in the Ends of the cabinet. The tongue on the bottom edge will fit into the groove in the Bottom Back Panel.
- Take the **Top Back Panel**. Fit this into place in the same way as the previous two panels.

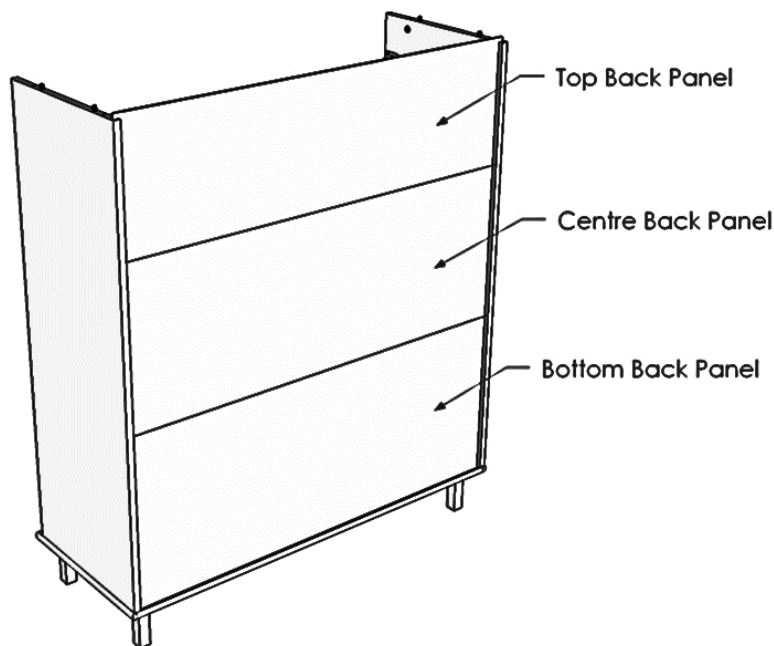


STEP 10 - TOP

- Fit the **H1 Connecting Bolts** installed in the **Top** to the **H2 Cams** installed in the **Ends**. Ensure that the Finished Edge of the Top is facing the same way as the finished edge of the Ends. The Top Back Panel will fit into the groove in the back of the Top.
- Turn the Metal Cams installed in the Ends in a clockwise direction to lock the Top to the Ends. Ensure they turn a least a $\frac{1}{4}$ to $\frac{1}{2}$ a turn

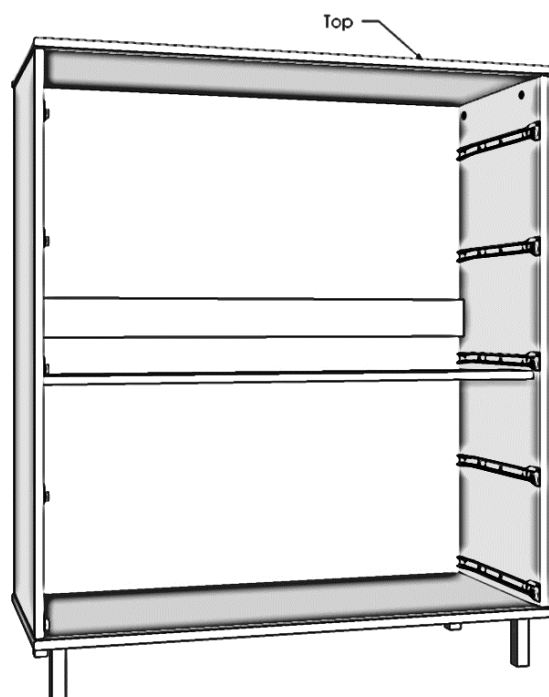


ASSEMBLE THE DRAWERS

Your Boston 5 Drawer Tallboy has five drawers. All Drawers are constructed from the same parts and are therefore assembled the same way.

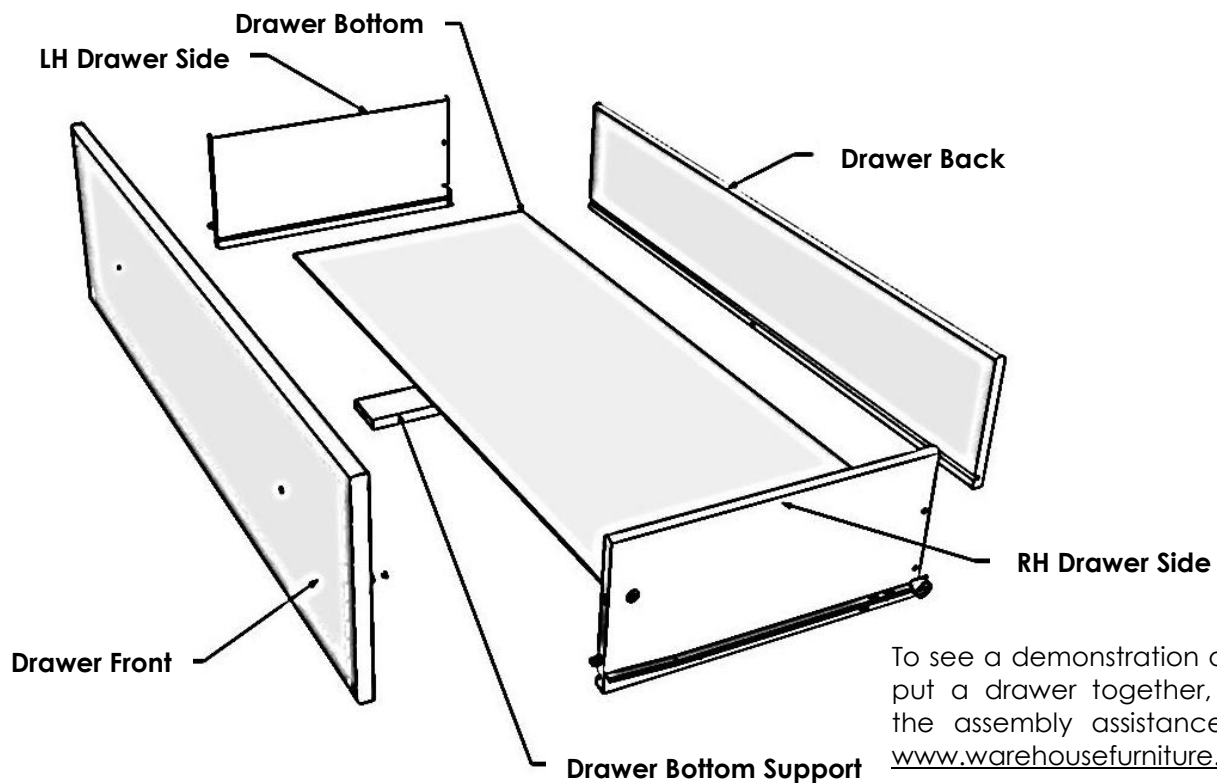


STEP 11 - INSTALL HARDWARE /DRAWERS

- Install the hardware in the drawer parts as shown below. *NOTE: Be sure that the arrow on the Small Cam points to the end of the drawer side nearest it.*

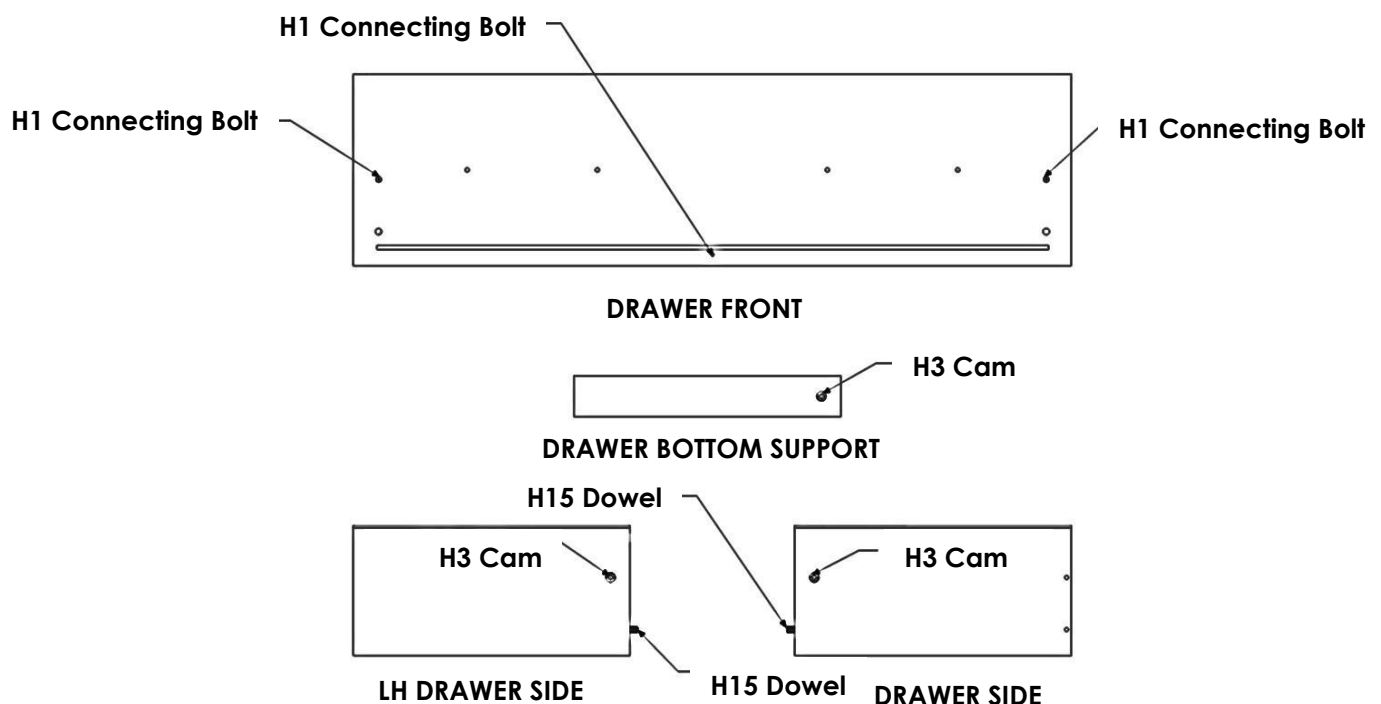


STEP 12 - SIDES AND BOTTOM

- Lay the **Drawer Front** face down on a smooth, clean surface.
- Attach the LH and RH **Drawer Sides** by fitting them into place over the Connecting Bolts installed in the Drawer Front.
- Turn the Small Cams clockwise to lock the Drawer Sides in place.
- Slide the **Drawer Bottom** into place in the grooves in the Drawer Sides and Drawer Front.

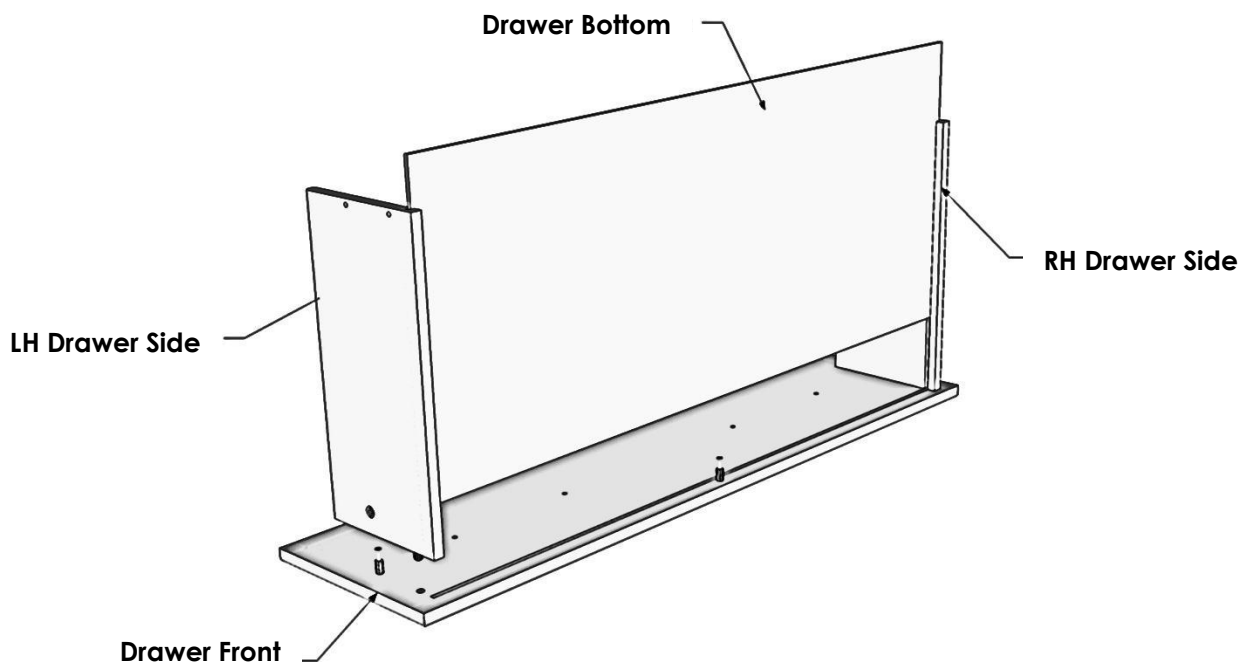


STEP 13 - ATTACH DRAWER BACK

- Fit the **Drawer Bottom Support** into place underneath the Drawer Bottom, the **H1 Connecting Bolt** in the centre back of the Drawer Front will fit up into the H3 Small Cam.
- Turn the H3 Small Cam in a clockwise direction to lock the Drawer Bottom Support in place.
- Fit the **Drawer Back** into place between the Drawer Sides. The groove in the Drawer Back will fit over the end of the Drawer Bottom.
- Secure the Drawer Sides and Drawer Bottom Support to the Drawer Back with five **H9 Screws** as shown below.

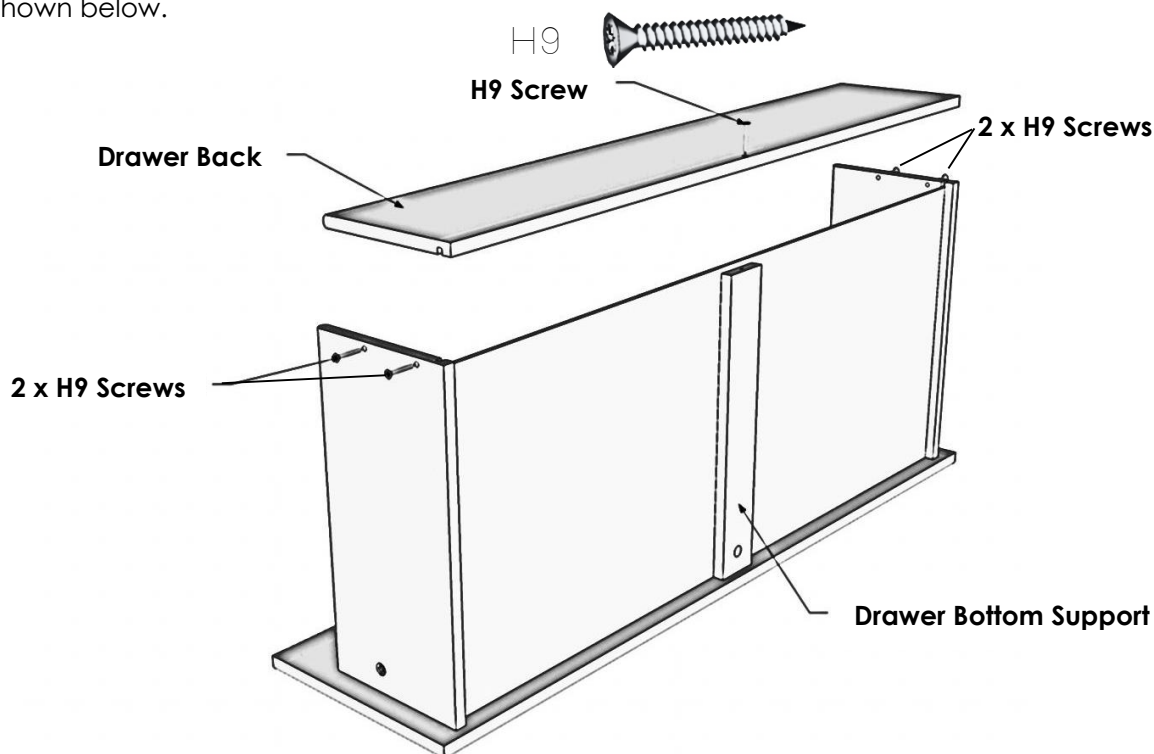


STEP 14 - ATTACH THE DRAWER SLIDES

- Turn the drawer upside-down as shown and attach the **Drawer Slides** (DR and DL) with the four **H6 Small Woodscrews** as shown below. Ensure that the ends of the slides without the wheels are hard up against the back of the drawer front as shown. Each slide requires two screws.

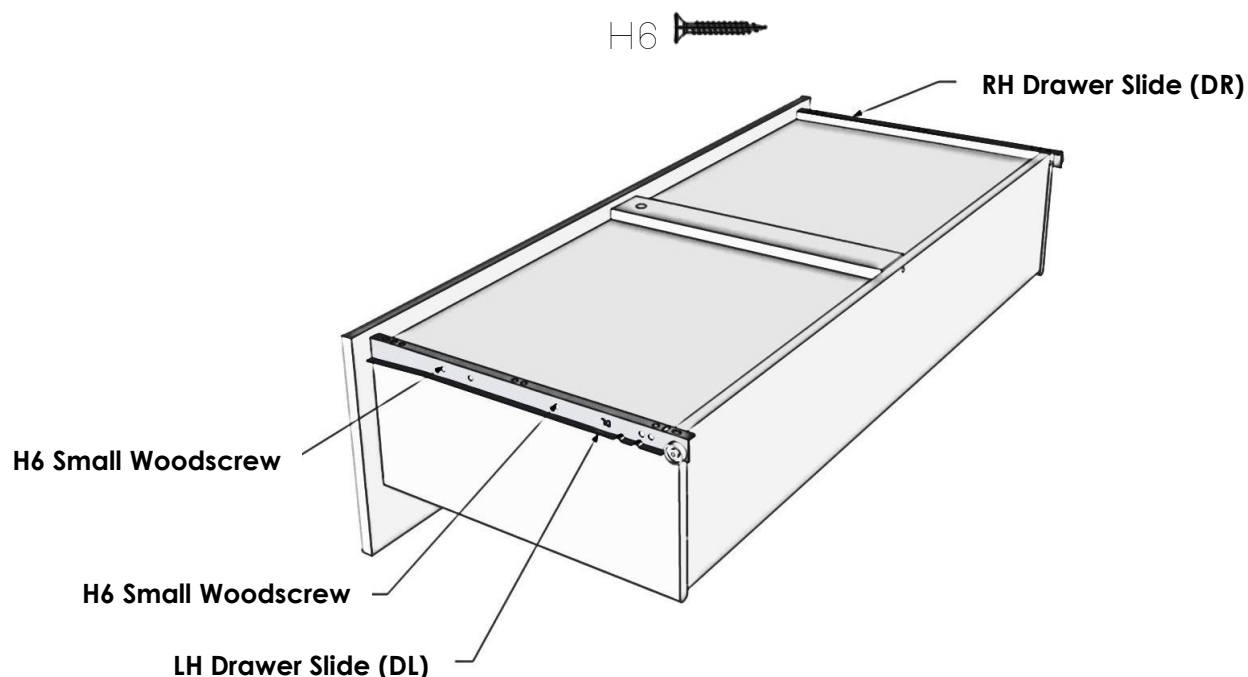


STEP 15 - ATTACH HANDLES AND FIT DRAWERS INTO CABINET

- Turn the drawer over and attach the handle using the screws provided.
- Fit the drawers into the cabinet. Start with the top drawers and work your way down.

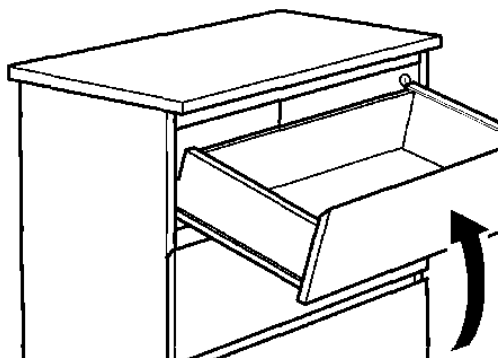

Angle the drawer slightly to ensure that the wheel at the back of the drawer slide goes behind the front wheel on the cabinet slide. Then lift the drawer up and slide it into the channel of the drawer slide.

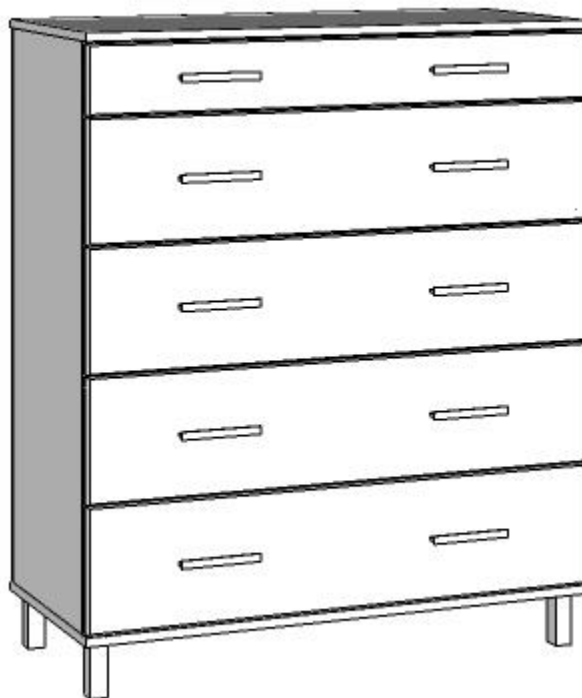

CONGRATULATIONS, YOUR **BOSTON** 5 DRAWER TALLBOY IS NOW COMPLETE.
THANK-YOU FOR SUPPORTING NEW ZEALAND MADE FURNITURE